


INSTALLATION INSTRUCTION


NOTE

- Please read the instructions carefully, get to know our shower seat and get prepared with the required tool in advance. Follow the instructions to install the shower seat correctly. This will help avoiding harming you and your family and your property.
- Please keep the instructions available after reading it carefully
- Please subject to the real products when the instructions are different from the real products. If there is any new update to products and its accessories, we will give no further notice.


Shower seat and Accessory set

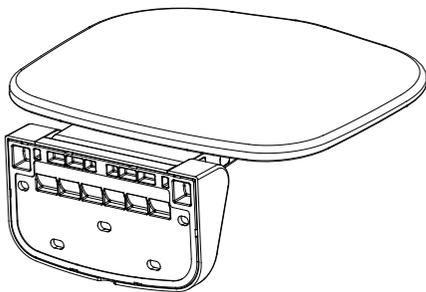

Shower seat

Parts	
	Chrome Base Cover x1
	Nylon Bolt Cap x5
	Screw x5
	Mounting Hole Guiding Sticker x1

Intallation Tools Needed



Drilling machine


Hammer

Socket wrench


Cautions

- 1: Please confirm whether the wall is a load-bearing pond before drilling;
- 2: Before drilling, please confirm whether there is a water pipe at the hole position;
- 3: Check whether the product accessories are complete before installation;
- 4: Make sure the drill bit is 10mm in size.
- 5: Make sure the hole depth is 6.5cm
- 6: The recommended heighth between the seat and ground is about 40-48cm.


INSTALLATION

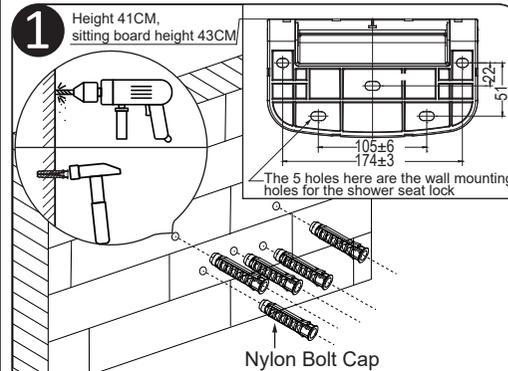


1. Firstly, drill 5 holes in the wall according to the screw holes of our shower seats (the drilling bit is 10mm , the holes depth is 6.5cm, based on the length of screws).Then use the hammer to knock the Nylon Bolt Caps into the wall holes.

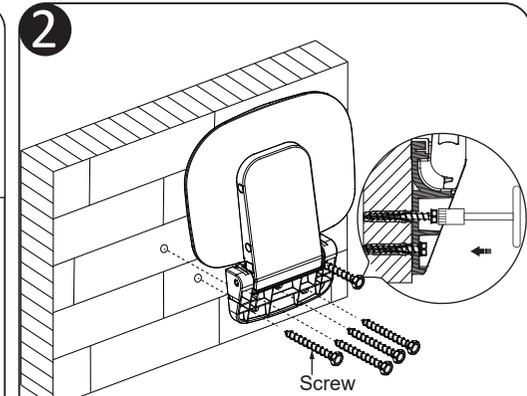

2. Place the shower seat on the wall , align the screw holes with the wall holes,and then tighten the screws with a socket wrench.

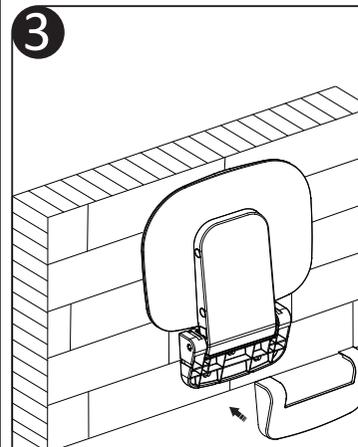

3. Cover the chrome base cover tightly.

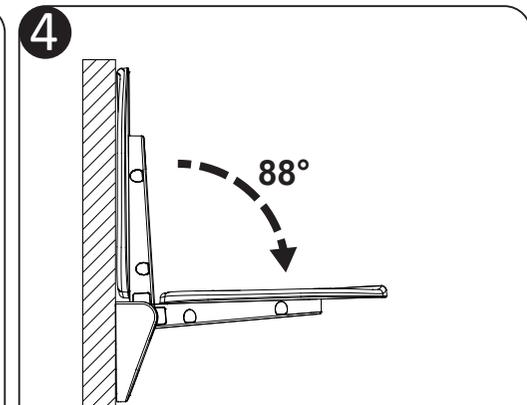

4. After installation, fold up the seat when not to use it and unfold it when to use.

*Note:The drilling bit is 10mm, and the drilling depth is greater than or equal to 6.5cm